


Waterfloc 2015

Description

- a blend of organic coagulants with high molecular weight cationic polyelectrolytes.
- specially formulated to work 2 to 4 times faster than most of the conventional type coagulants such as Alum and Ferric Chloride.
- contains non-oxidizing antimicrobial formulation to prevent the growth of biofilms and minimize the number of planktonic microorganisms in the bulk fluid.
- Easy to handle, cost effective and exhibit excellent performance.

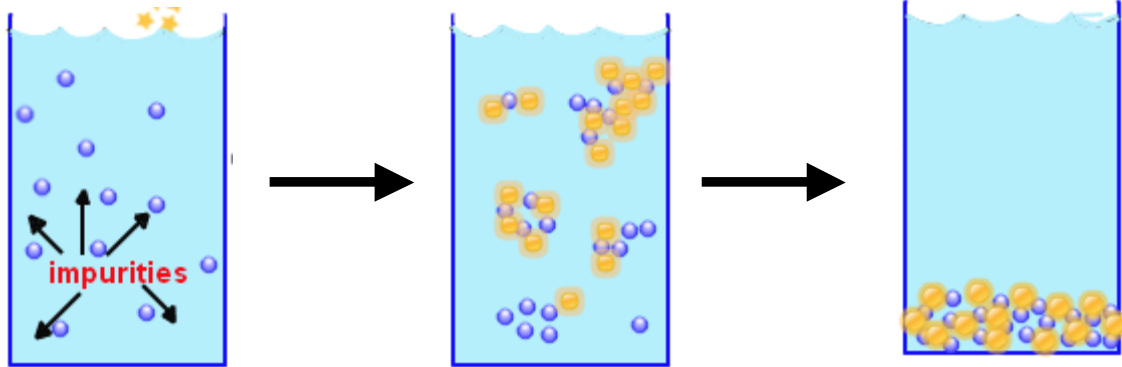

Waterfloc 2015 added

Coagulant forms
precipitate and trapping
impurities

Precipitate and trapped
impurities settle to bottom

Principal Uses

Coagulant for:

Ground water, surface water, waste water, swimming pool water, fountain water & pond water.

Treatment Level

- Dosage varies depending on the color, impurities and turbidity of the water.
- Recommendation will be provided for appropriate treatment level.

Instruction

- Inject by using chemical resistance metering pump or gravity doser.
- Feed directly from the drum into system or dilute it with water before use.

Packing

25 litre/drum

Contact Us:

Hydromission Sdn. Bhd. (535368-U)

HQ: 20, Lintang Beringin 6, Diamond Valley Industrial Park, Jalan Permatang Damar Laut, 11960 Bayan Lepas, Penang, Malaysia.

Branch: No. 72, Jalan E2/10, Taman Ehsan, Kepong, 52100 Kuala Lumpur, Malaysia.

Tel: 04-626 1187, 626 6973 Fax: 04-626 6975

HP: 012-422 1368 (Mr. K K Chang), 012-570 5211 (Ms. S F Foong)

Email: hydromission@gmail.com, mizutech88@gmail.com

Website: www.hydromission.com.my